

Product Manual

NO. : JG18-008438

REV : R1.0

DATE: 2018-04-13

Lithium-ion Rechargeable Battery

Product Manual

Product Name : LiFePO4 Battery Pack

Product Specification : 25.6V100Ah

Designed	Checked	Approved
Yao Yao	Kyle	Shijie Ren

SECTION I / II

Security rating: ☐Top secret☐ Confidential ☒Secret☐ Ordinary

Product Manual

NO. : JG18-008438

REV : R1.0

DATE: 2018-04-13

1. Preface

This manual describes the type and size, performance, technical characteristics, warning and caution.

2. Product and Model

2.1 Product: Lithium-ion Battery Pack

2.2 Model: 8IFR25.6-100-Y (26650-3.2V-8S32P)

2.3 Picture And Output Wire (In order to prevail in kind)



Positive	Red one wire with 6AWG	120A Red Anderson
Negative	Black one wire with 6AWG	

SECTION I / II

Security rating: ☐Top secret ☐ Confidential ☒Secret ☐ Ordinary

Product Manual

NO. : JG18-008438

REV : R1.0

DATE: 2018-04-13

3. Battery Pack Specifications

Items		Parameters
Nominal voltage		25.6V
Typical capacity		100±3Ah(At 0.2C discharge rate)
Discharge	normal current	≤ 50A
	cut-off voltage	About 20V
Charge	voltage	28.8±0.15V
	current	≤ 20A
	Charge mode	CC/CV , please use special lithium charger
Inner resistance	Discharging Inner resistance	≤ 40mΩ
Operation temperature/ humidity range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +60°C
		When the environment temperature is higher than 45°C , please pay attention to ventilation and heat rejection.
	humidity	RH≤ 85%, When the environment humidity is higher than 85% , please pay attention to protect
Operation temperature/ humidity range	temperature	0°C ~ 40°C (Capacity 80%) Recommended long-term storage temperature is 15~25°C
	humidity	RH≤ 50% , Easily oxidized components note sealed
Protection function	Over charge protection 、 Over discharge protection 、 Temperature protection、 Balanced function	
Shell material	Iron	
Weight	31±1kg	
Size (L*W*H)	(340±3) mm * (230±2) mm * (230±3) mm	
Cycle	Standard charge at 0.2C (A) , rest 0.5~1 h , discharge at 0.2C to cut off voltage , rest 0.5~1h,repeat the above steps until 1500 cycles.(capacity retention rate≥ 80%)	

SECTION I /II

Security rating: ☐Top secret☐ Confidential ☒Secret☐ Ordinary


Product Manual

NO. : JG18-008438

REV : R1.0

DATE: 2018-04-13

4.Characteristic curve

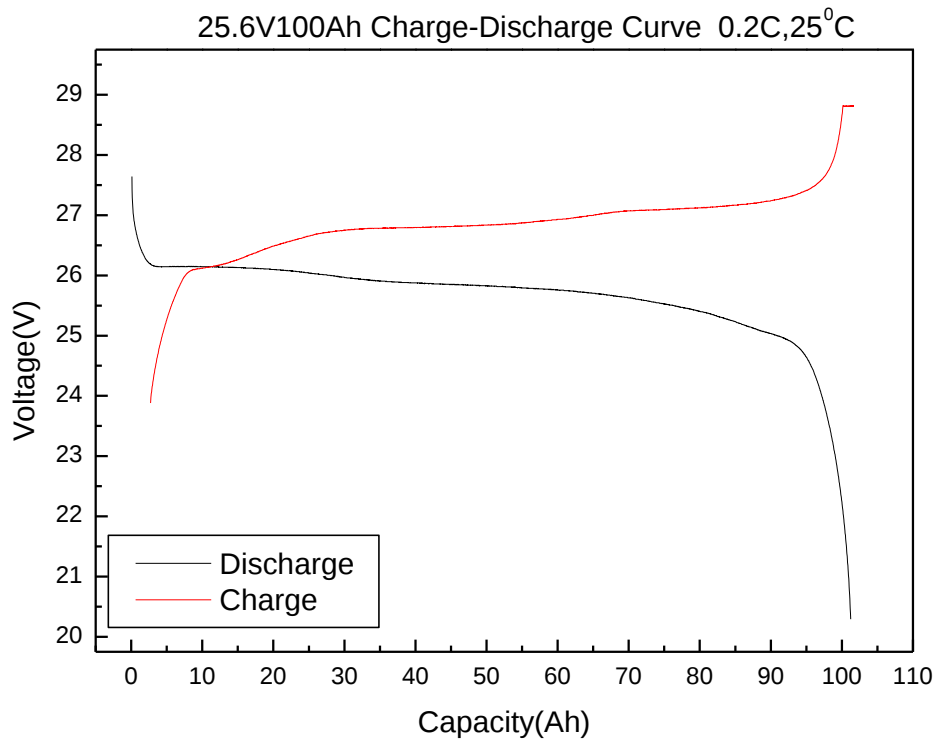

5. Product Liability

It is not responsible for the incident caused by not obeying the Manual. Before using the battery, you should read the specifications(The manual is divided into two parts), usage instruction and some attentions carefully to learn its application method and areas. If the phenomenon such as error using method or wrong circuit connection, or input power data, working index are inconsistent with the Manual , cause damage to product, load and its accessories, we are not responsible for it.

Our company have the right to change the content of specification without prior notice ;

The final explanation of specification belongs to our company.

SECTION I /II

Security rating: ☐Top secret ☐ Confidential ☒Secret ☐ Ordinary