



Lithium-ion Rechargeable Battery

Product Manual

Product Name : LiFePO4 Battery Pack

Product Specification : 3.2V4.5Ah

Designed	Checked	Approved
Lei Chen	Peng Ren	Shijie Ren



Shandong Goldencell Electronics Technology CO.,LTD Product Manual

NO. : JG16- 003750

REV : R1.0

DATE: 2016-03-11

1. Preface


This manual describes the type and size, performance, technical characteristics, warning and caution of the rechargeable pack. The specification only applies to 3.2V4.5Ah pack supplied by Shandong Goldencell Electronics Technology CO.,LTD.

2. Product and Model

2.1 Product: Lithium-ion Battery Pack

2.2 Model: 1IFR3.2-4.5-Y (18650-3.2V-1S3P)

2.3 Picture And Output Wire (In order to prevail in kind)

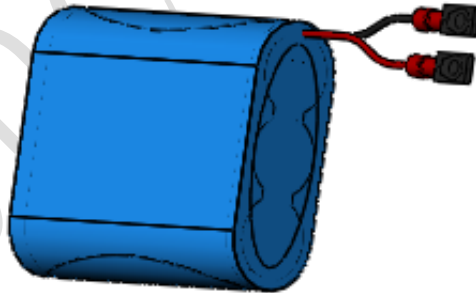

Positive output	Red one wire with 20AWG	Length :100±5mm	RV1.25-3 Terminal
Negative output	Black one wire with 20AWG	Length :100±5mm	

SECTION I / II

Security rating: Top secret Confidential Secret Ordinary



Shandong Goldencell Electronics Technology CO.,LTD Product Manual

NO. : JG16- 003750

REV : R1.0

DATE: 2016-03-11

3. Battery Pack Specifications


Items		Parameters
Nominal voltage		3.2V
Typical capacity		4.5±0.2Ah(At 0.2C discharge rate)
Discharge	Normal current	≤ 0.2A
	Max continuous current	≤ 0.35A (≤ 5min)
	Cut-off voltage	About 2.5V
Charge	Voltage	3.6±0.1V
	Current	≤ 0.2A
	Charge mode	CC/CV , please use special lithium charger
Inner resistance	Discharging Inner resistance	≤ 80mΩ
Operation temperature/ humidity range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +60°C
		When the environment temperature is higher than 45°C , please pay attention to ventilation and heat rejection.
Humidity	RH≤ 85%, When the environment humidity is higher than 85% , please pay attention to protect	
Operation temperature/ humidity range	Temperature	0°C ~ 40°C (Capacity 80%) Recommended long-term storage temperature is 15~25°C
	Humidity	RH≤ 50% , Easily oxidized components note sealed
Protection function	Over charge protection、 Over discharge protection	
Shell material	PVC	
Weight	145±10g	
Size (L*W*H)	(21±1) mm * (57±1) mm* (70±1) mm	
Cycle	Standard charge at 0.2C (A) , rest 0.5~1 h , discharge at 0.2C to cut off voltage , rest 0.5~1h,repeat the above steps until 1500 cycles.(capacity retention rate≥ 80%)	

SECTION I / II

Security rating: Top secret Confidential Secret Ordinary



4.Characteristic curve

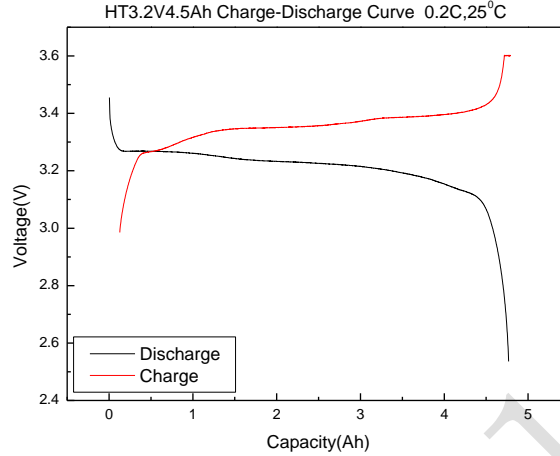

5. Product Liability

Shandong Goldencell Electronics Technology CO.,LTD is not responsible for the incident caused by not obeying the Manual. Before using the battery, you should read the specifications(The manual is divided into two parts), usage instruction and some attentions carefully to learn its application method and areas. If the phenomenon such as error using method or wrong circuit connection, or input power data, working index are inconsistent with the Manual , cause damage to product, load and its accessories, we are not responsible for it.

Our company have the right to change the content of specification without prior notice ;

The final explanation of specification belongs to our company.

If you have any questions, please contact the following address:

Headquarter