

Product Manual

NO. : JG18-008916

REV : R1.0

DATE: 2018-05-28

Lithium-ion Rechargeable Battery

Product Manual

Product Name : Li-ion Battery Pack

Product Specification : 36V13Ah

Designed	Checked	Approved
Yao Yao	Chne Chen	Shijie Ren

SECTION I / II

Security rating: Top secret Confidential Secret Ordinary

Product Manual

NO. : JG18-008916

REV : R1.0

DATE: 2018-05-28

1. Preface

This manual describes the type and size, performance, technical characteristics, warning and caution.

2. Product and Model

2.1 Product: Lithium-ion Battery Pack

2.2 Model: 101TR36-13-Y (18650-3.6V-10S5P)

2.3 Picture And Output Wire (In order to prevail in kind)



Charge	DC5.5*2.1 (Inside+ Outer-)		
Discharge	Positive	Red one wire with 12AWG	Length : 300±20 mm
	Negative	Black one wire with 12AWG	Length : 300±20 mm

SECTION I / II

Security rating: Top secret Confidential Secret Ordinary

Product Manual

NO. : JG18-008916

REV : R1.0

DATE: 2018-05-28

3. Battery Pack Specifications

Items		Parameters
Nominal voltage		36V
Typical capacity		13±0.5Ah(At 0.2C discharge rate)
Discharge	Normal current	≤ 10A
	Max continuous current	20A (≤ 5min)
	Cut-off voltage	About 30V
Charge	Voltage	42±0.2V
	Current	5A
	Charge mode	CC/CV , please use special lithium charger
Inner resistance	Discharging Inner resistance	≤ 130mΩ
Operation temperature/ humidity range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +60°C
		When the environment temperature is higher than 45°C , please pay attention to ventilation and heat rejection.
Humidity	RH≤ 85%, When the environment humidity is higher than 85% , please pay attention to protect	
Storage temperature/ humidity range	Temperature	0°C ~ 40°C (Capacity 80%) Recommended long-term storage temperature is 15~25°C
	Humidity	RH≤ 50% , Easily oxidized components note sealed
Protection function	Over charge protection 、 Over discharge protection 、 Temperature protection 、 Balanced function	
Shell material	Plastic	
Weight	4.7±0.1kg	
Size (L*W*H)	(453±2) mm * (163±2) mm * (60±2) mm	
Cycle	Standard charge at 0.2C (A) , rest 0.5~1 h , discharge at 0.2C to cut off voltage , rest 0.5~1h,repeat the above steps until 500 cycles.(capacity retention rate≥ 80%)	

SECTION I / II

Security rating: Top secret Confidential Secret Ordinary


Product Manual

NO. : JG18-008916

REV : R1.0

DATE: 2018-05-28

4.Characteristic curve

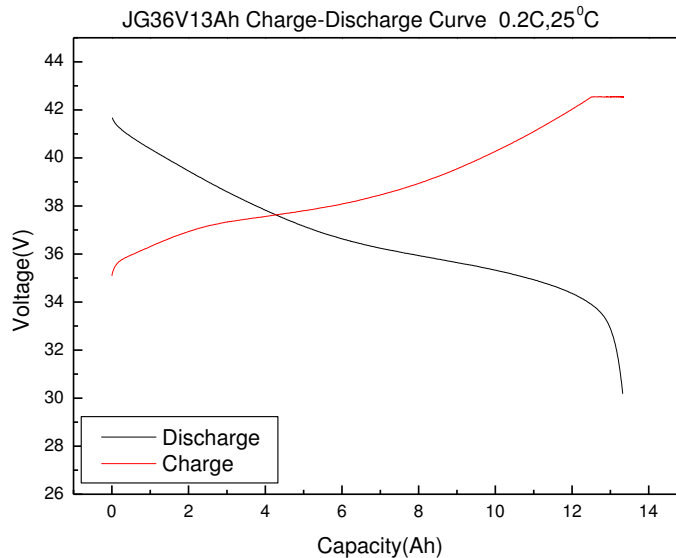

5. Product Liability

It is not responsible for the incident caused by not obeying the Manual. Before using the battery, you should read the specifications(The manual is divided into two parts), usage instruction and some attentions carefully to learn its application method and areas. If the phenomenon such as error using method or wrong circuit connection, or input power data, working index are inconsistent with the Manual , cause damage to product, load and its accessories, we are not responsible for it.

Our company have the right to change the content of specification without prior notice ;

The final explanation of specification belongs to our company.

SECTION I / II

Security rating: Top secret Confidential Secret Ordinary